
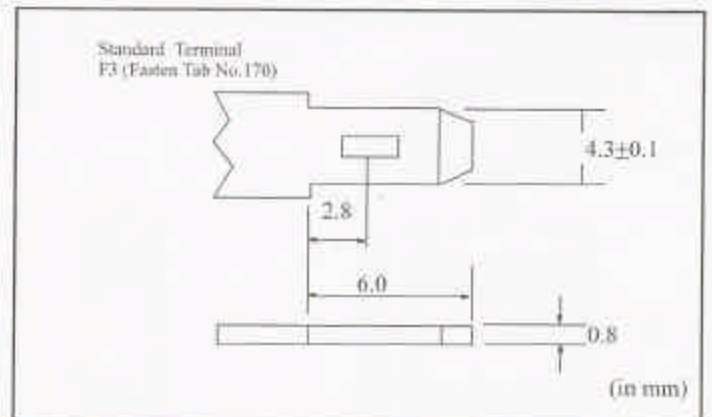


PHYSICAL SPECIFICATION

Nominal Voltage		6V
Nominal Capacity(20HR)		1.2AH
Dimension	Length	97±1mm (3.82 inches)
	Width	24±1mm (0.94 inches)
	Container Height	51±2mm (2.01 inches)
	Total Height	57±2mm (2.24 inches)
Weight		Approx 0.30Kg (0.66 lbs)
Standard Terminal		F3-Faster Tab No.170

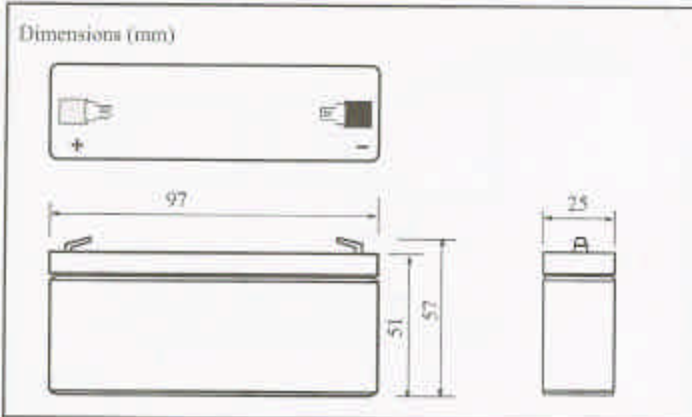

ELECTRICAL SPECIFICATION

Capacity	20 hour rate(0.06A)	1.2Ah	It is recommended to use constant-voltage charge and recharge immediately after use
	10 hour rate(0.12A)	1.14Ah	
	5 hour rate(0.19A)	1.02Ah	
	1 hour rate(0.72A)	0.72Ah	
Capacity affected by temperature	40°C (104°F)	105%	Constant-Voltage Charge
	20°C (68°F)	100%	
	0°C (32°F)	85%	Cycle
Internal Resistance	Fully charged battery(20°C, 68°F)50mΩ		Standby
			Initial Charging Current less than 0.39A Voltage 7.20-7.50V at 20°C (68°F) Temperature Coefficient -15mV/°C
		Voltage 6.75-6.90V at 20°C (68°F) Temperature Coefficient -10mV/°C	

