


6GFM200(12V200AH)


Major Application(s): Starting system etc.

PHYSICAL SPECIFICATION

Nominal Voltage		12V
Nominal Capacity(10HR)		200AH
Dimension	Length	497±2mm (19.57inches)
	Width	260±2mm (10.24inches)
	Container Height	207±2mm (8.15inches)
	Total Height	241±2mm (9.49inches)
Weight		Approx 67.5Kg (148.68 lbs)
Standard Terminal		B3(Bolt & nuts Terminal) Bolt Type : M8

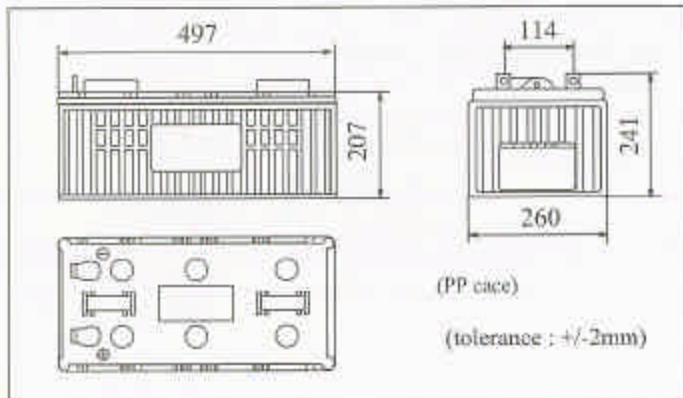

B3 (Bolt-and-nut lead terminal)
Bolt Type : M8

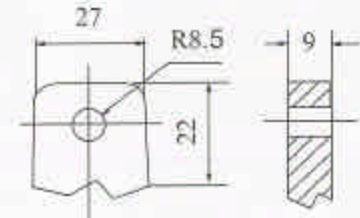

ELECTRICAL SPECIFICATION

Capacity	20 hour rate(10A)	210Ah	It is recommended to use constant-voltage charge and recharge immediately after use
	10 hour rate(20A)	200Ah	
Capacity affected by temperature	5 hour rate(34A)	170Ah	Constant-Voltage Charge
	3 hour rate(50A)	150Ah	
	1hour rate(120A)	120Ah	Cycle
	40 °C (104°F)	102%	Initial Charging Current less than 50A Voltage 14.1V-14.4V at 25°C (77°F) Temperature Coefficient -18mV/°C
Internal Resistance	25 °C (77°F)	100%	Standby
	0 °C (32°F)	85%	
Internal Resistance		Fully charged battery(25 °C, 77°F)3mΩ	

