

HYDROGEN GAS MONITOR

STANDARD

Regulations

In Compliance With:

- CSA/NRTL Certified


Specifications

- 115 VAC 24 VDC, or 48 VDC
- Indoor enclosure
- Box size: 4 3/8"w x 9 1/4"h x 3 11/16"d
- Weight: 5 lbs.
- Wall mounted.
- Operating Temp. : 35-120°F
- Relay Ratings: 12Amps, form C contacts
- Calibration required every 3 months.

Description

FEATURES:

- Low maintenance
- Two alarm levels: Low and High
- Internal audible alarm
- Combustible Sensor

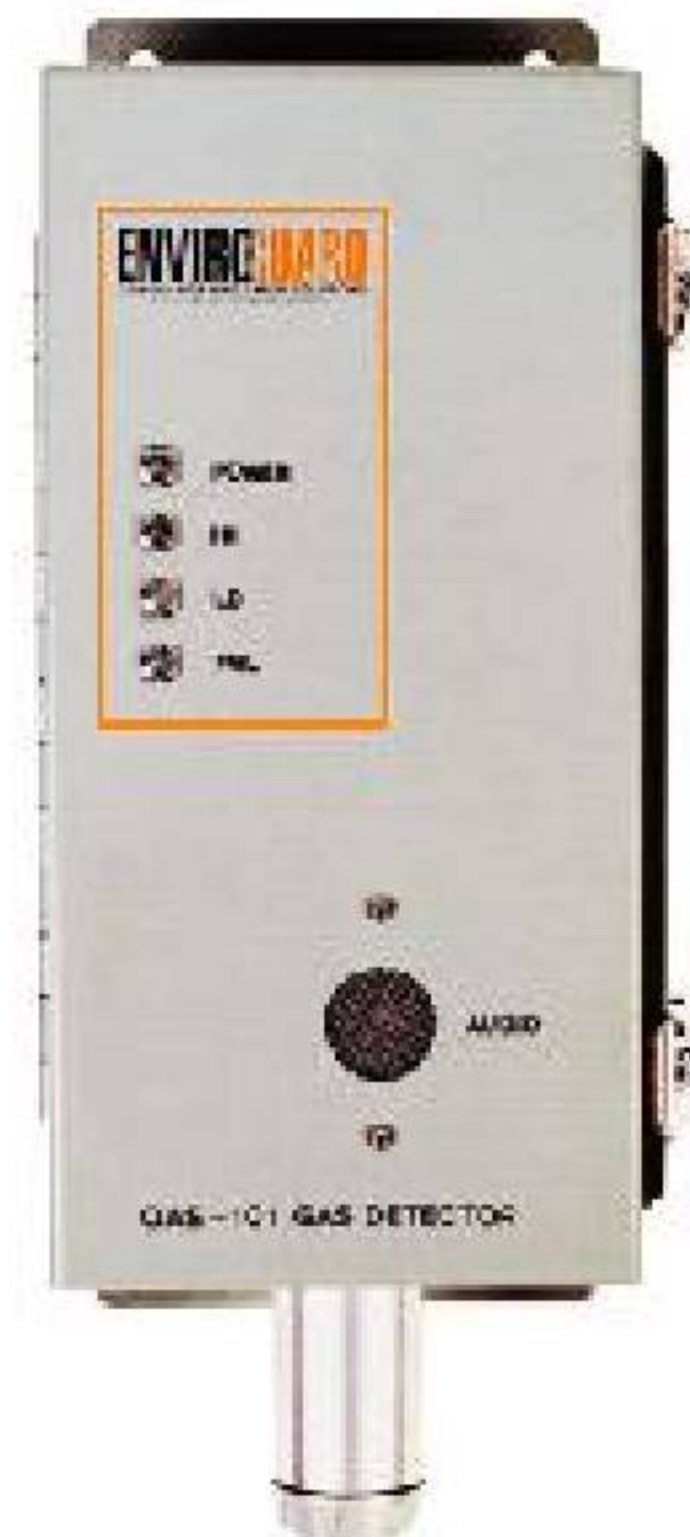

PART NUMBER: HYD-S