



### PHYSICAL SPECIFICATION

Nominal Voltage		2V
Nominal Capacity(10HR)		200AH
Dimension	Length	171±2mm (6.73inches)
	Width	106±2mm (4.17inches)
	Container Height	330±2mm (13.0inches)
	Total Height	365±2mm (14.4inches)
Weight		Approx 15.5.Kg (34.2 lbs)
Standard Terminal		B3(Bolt & nuts Terminal) Bolt Type : M10

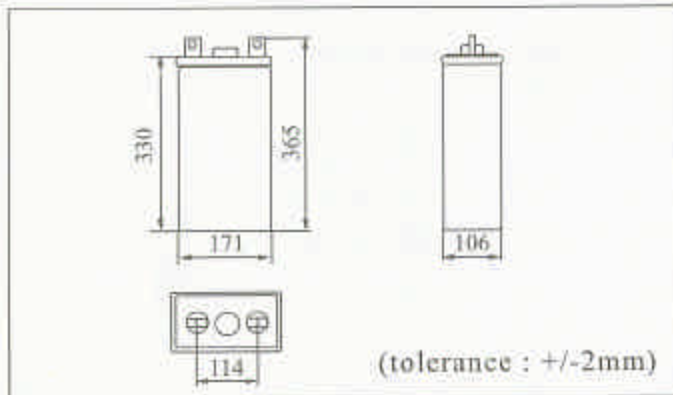

B3 ( Bolt-and-nut lead terminal)  
Bolt Type: M10

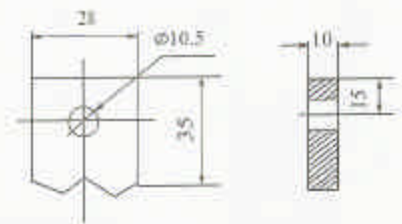


### ELECTRICAL SPECIFICATION

Capacity	20 hour rate(10A)	210Ah
	10 hour rate(20A)	200Ah
	5 hour rate(34A)	170Ah
	3 hour rate(50A)	150Ah
	1hour rate(120A)	120Ah
Capacity affected by temperature	40 °C (104°F)	102%
	25 °C (77°F)	100%
	0 °C (32°F)	85%
Internal Resistance	Fully charged battery(25 °C, 77°F)2mΩ	

It is recommended to use constant-voltage charge and recharge immediately after use

Constant-Voltage Charge	Cycle	Initial Charging Current less than 30A Voltage 14.1V-14.4V at 25°C (77°F) Temperature Coefficient -18mV/°C
	Standby	No limit on Initial Charging Current Voltage 13.5V-13.8V at 25°C (77°F) Temperature Coefficient -18mV/°C

Discharge Characteristics(25°C, 77°F)

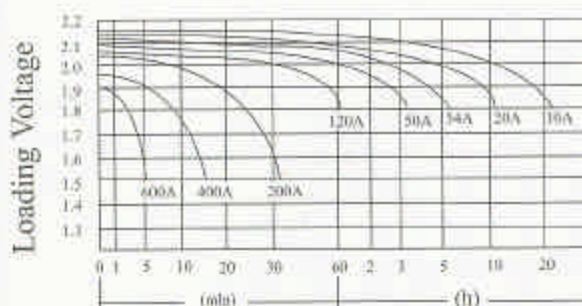

Discharge Current & Discharge Duration Time

